



III、Controller use instruction

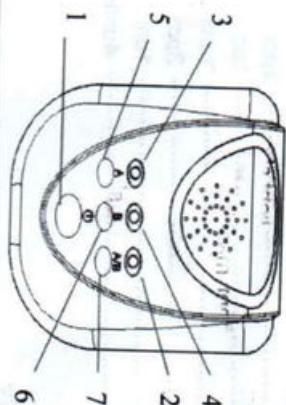


- 1、electricity switch
- 2、electricity indicator light
- 3、Front machine indicator light
- 4、Back machine indicator light
- 5、Front machine keystroke
- 6、Back machine keystroke
- 7、Front and back keystroke



- 8、A, Front machine keystroke
 - 9、B, Back machine keystroke
 - 10、C, Front and back keystroke
- Control distance is about 50m

2

V、Fix instruction

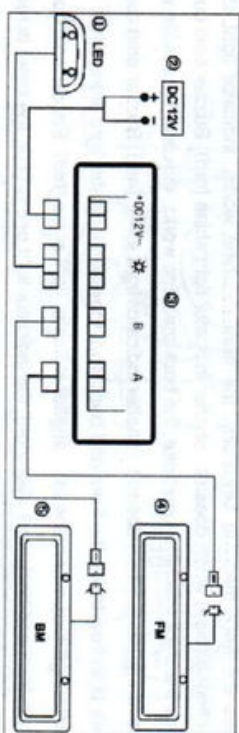

Fixing notice: Please use crop bolt, do not block the shelter cloth and pole, for fear the indicator light failure.

1. LED light
2. DC 12V power
3. Control Box
4. Frontside machine
5. Backside machine

IV、Controller operate instruction

- 1、Turn on the electricity switch, the electricity indicator light shine (red). Buzzer emit cue tone.
- 2、Press the front machine keystroke, the front machine works. indicator light shine while sheltering (blue) when doesn't shelter indicator light shine (red). Buzzer emit cue tone.
- 3、Press the back machine keystroke, the back machine works. indicator light shine while sheltering (blue), when doesn't shelter indicator light shine (red). Buzzer emit cue tone.
- 4、Press both keystroke, the front and back work together, indicator light shine while sheltering (blue), when doesn't shelter indicator light shine (red). Buzzer emit cue tone.
- 5、When front and back work disaccord, the indicator light one is blue, the other is red, external indicator light (red), press both switch keystroke again, stand-alone restoration automatically, front and back works accordance.
- 6、When front and back doesn't shelter, the indicator light shine red, external indicator light doesn't shine.

3

I. Check attachment

- 1、plate..... 2pcs
- 2、control box 1pc
- 3、controller 1unit
- 4、electric wire 3pcs
- 5、external indicator light..... 1unit
- 6、bolt 4units

II. specification

- 1、model: GB-666U
- 2、input voltage: DC 12V
- 3、rating current: 0.6A
- 4、rating power: 2W
- 5、length of wire: 2M×1、3.3M×1、5.9M×1 / external indicator light: 2M
- 6、distance of control: About 50M
- 7、time of ascent and descent: 3 seconds
- 8、weight: 2.5Kg
- 9、dimension of product: 315mm(L)×170 mm(W)×25.8mm(H)
- 10、dimension of packing: 335mm(L)×185 mm(W)×75 mm(H)